

MINI **15 EXJ**



www.ommelift.com

Trailer lift - Articulated

Dealer:


 Liftgruppen

OMMELIFT


Liftgruppen AB

Victor Hasselblads Gata 9
Västra Frölunda, 42131, Sweden
+46 10 722 30 00
info@liftgruppen.se
www.liftgruppen.se

Mini 15 EXJ Trailer lift

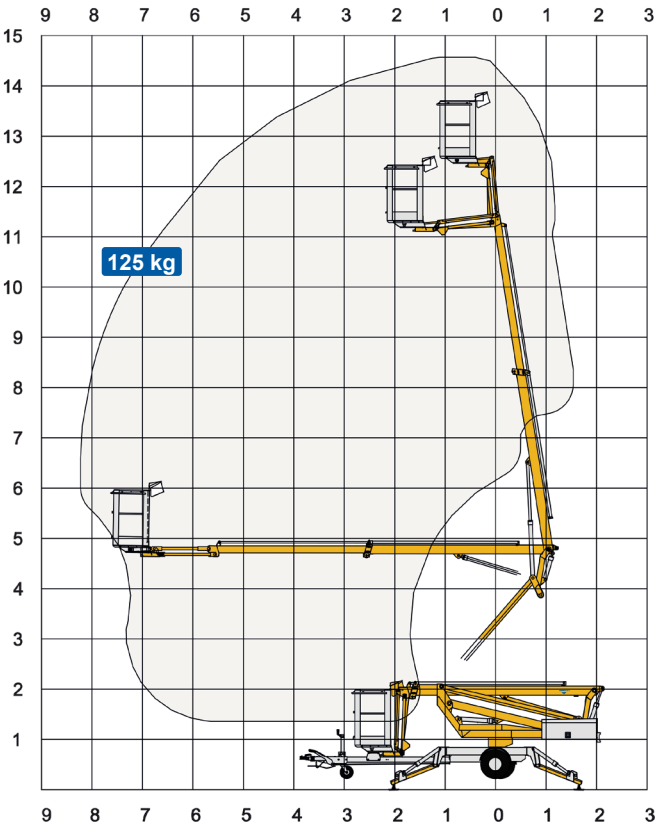

Technical Data:	Mini 15 EXJ	Mini 15 EXBJ
Max. working height	14.6 m	
Max. platform height	12.6 m	
Max. outreach	8.3 m	
Up and over clearance	4.5 m	
Angle boom length (boom + basket)	-	
Jib length (jib + basket)	2.0 m	
Vertical jib rotation	90°	
Turret rotation	± 355°	
Basket rotation	-	
Max. basket load	125 kg	
Basket size	0.85 x 0.7 x 1.1 m	
Stabilizer pad size	ø200 mm	
	230V / 10A	BATTERY
Engine		
Fuel tank capacity	-	
Generator		
Battery pack	24V/139Ah/5h	
Charger	24 V / 15 A	
Double charger system	Optional	
Elec. descent	Optional	Optional
See www.ommelift.com for more features and options		
Self-propulsion with hydraulic engagement of traction rollers	Standard	
Gradeability	14% / 8°	
Ground to tire clearance at max. set-up	Min. 170 mm (10.4% / 6.0°)	
Total weight	1500 kg	1500 kg
Ground pressure, outrigger pad	10.0 kg/cm ²	10.0 kg/cm ²
Ground pressure with 0.4 x 0.4 m spreader plate	0.5 kg/cm ²	0.5 kg/cm ²
Max. force, outrigger	8.5 kN	8.5 kN
Hydraulic stabilizers	Standard	
Controls	2-step	
Flush basket mount	Standard	
Elec. power outlet in basket	Standard	
Tool tray in basket	Standard	

